

# BIO-BASED AND BISPHENOL-FREE EPOXY RESINS

DATASHEET **SP-3430\_C** **SP-3661\_C**  
**SP-3449\_C** **SP-3645\_C** **SP-3646\_C**

## INTRODUCTION

SPECIFIC POLYMERS' range of epoxy resins redefines industry standards by **introducing advanced epoxy formulations** entirely **free from bisphenol derivatives**. Harnessing the unique characteristics of their core ingredients, our solutions offer the **essential properties to meet end-users' requirements**.



### **SP-3430\_C & SP-3661\_C: alternative to standard DGEBA**

Leading our innovations, **SP-3430\_C** and **SP-3661\_C BP-free epoxy resins** represent **ideal alternatives to standard DGEBA**, providing comparable **viscosity profiles**, enhanced **reactivity**, and equivalent **performance** when combined with **conventional hardeners**. While **SP-3430\_C** is derived from **depletable resources**, **SP-3661\_C** pushes the boundaries, delivering **same performances** with an unparalleled **biobased carbon** content of up to **72%**.

Both **SP-3430\_C** and **SP-3661\_C** are particularly **suitable for pultrusion** and **filament winding processes**.

### **SP-3449\_C, SP-3645\_C & SP-3646\_C: alternative to low-viscosity DGEBA**

To expand our portfolio and unlock new possibilities, **100% reactive low-viscosity epoxy formulations SP-3449\_C, SP-3645\_C & SP-3646\_C** have been developed to fulfill the requirements of processes such as **infusion and RTM**.

All **free** from any trace of **bisphenol derivatives**, **SP-3645\_C & SP-3646\_C** are characterized by **biobased content of 32 and 61 %** respectively, allowing manufacturers to align with their sustainability strategies

## KEY FEATURES

- 1.** Bisphenol-free resins
- 2.** Product grades available with biobased carbon content ranging from 0 to 72%.
- 3.** Orange viscous liquids at room temperature
- 4.**
  - SP-3430\_C and SP-3661\_C : Comparable viscosity and performance to standard DGEBA resin
  - SP-3449\_C, SP-3645\_C & SP-3646\_C : Comparable viscosity and performance to low-viscosity DGEBA resin formulations
- 5.** Improved reactivity compared to standard DGEBA and low viscosity DGEBA


### TYPICAL DATA OF NEAT RESIN

Reference	Characteristic	Biobased carbon content (%)	Epoxy content (meq/g)	Epoxy Equivalent Weight (g/eq)	Viscosity at 25°C (mPa.s)	Application
SP-3430_C	BP-free alternative to unmodified standard DGEBA	0	7.3 - 8.2	118 - 139	4000 - 7000	General purpose application. Suitable for pultrusion and filament winding processes
SP-3661_C	BP-free and biobased alternative to unmodified standard DGEBA	72	7.3 - 8.2	118 - 139	4000 - 7000	
SP-3449_C	Low viscosity BP-free epoxy resin	0	7.3 - 8.2	118 - 139	700-1200	Low viscosity versions suitable for infusion and RTM processes
SP-3645_C	Low viscosity BP-free and biobased epoxy resin	36	7.3 - 8.2	118 - 139	700-1200	
SP-3646_C	Improved biobased carbon content version of SP-3645_C	61	7.3 - 8.2	118 - 139	700-1200	

### VISCOSITY PROFILES OF NEAT RESINS

Reference	Viscosity profiles of neat resins (mPa.s)					
	20 °C	25 °C	30 °C	40 °C	60 °C	80 °C
SP-3661_C or SP-3430_C	10500	5500	2950	990	185	60
SP-3449_C or SP-3645_C or SP-3646_C	1610	950	600	270	73	28

### VISCOSITY PROFILE OF NEAT RESIN #3430 COMPARED TO PURE DGEBA

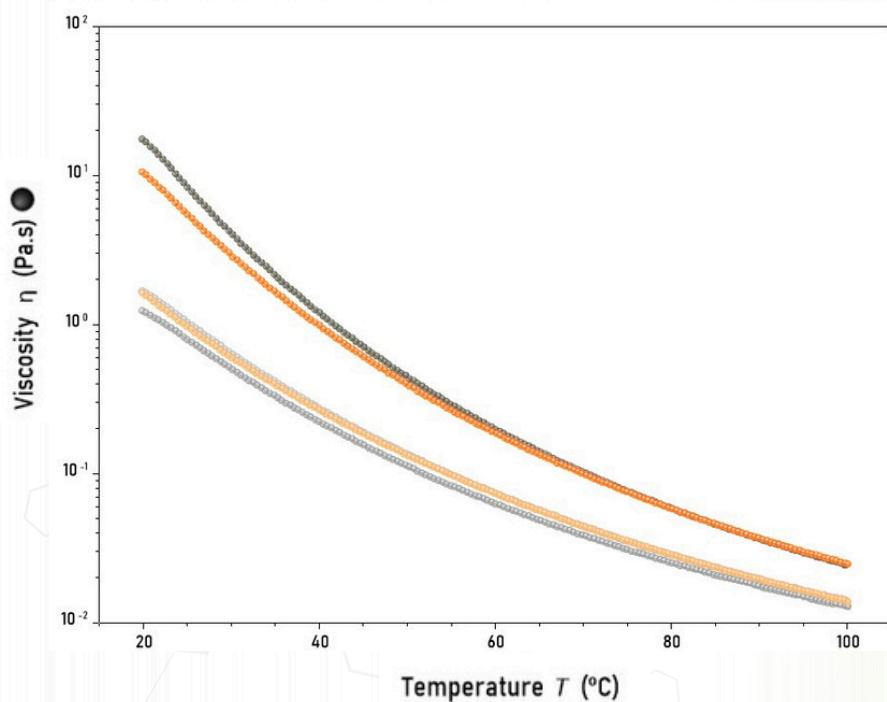

- Standard DGEBA
- SP's BP-free alternatives (SP-3430\_C)
- Standard diluted DGEBA-1
- Standard diluted DGEBA-2
- SP's BP-free low-viscosity alternatives (SP-3449\_C)

### SP-3430\_C & SP-3661\_C

Typical data obtained when cured with commercial aromatic hardener

Reference	With aromatic-type hardener		With cycloaliphatic-type hardener	
	SP-3430_C or SP-3661_C	DGEBA	SP-3430_C or SP-3661_C	DGEBA
Tonset (°C)*	135	157	55	80
Tpeak (°C)*	177	200	92	116
ΔH (J/g)*	410	300	511	423
Tg (°C)**	170	160	154	155

\* First DSC heating ramp. \*\* Second DSC heating ramp

### SP-3449\_C, SP-3645\_C & SP-3646\_C

Typical data obtained when cured resin with hardener suitable for infusion process

Reference	With infusion-type hardener	
	SP-3449_C or SP-3645_C or SP-3646_C	Low viscosity formulated DGEBA
Mix viscosity (mPa.s) at 25 °C	190	209
Mix viscosity (mPa.s) at 40 °C	163	150
Tonset (°C)*	81	93
Tpeak (°C)*	117	131
ΔH (J/g)*	554	432
Tg (°C)**	105	84

\* First DSC heating ramp. \*\* Second DSC heating ramp